


IDFA55E to 75E

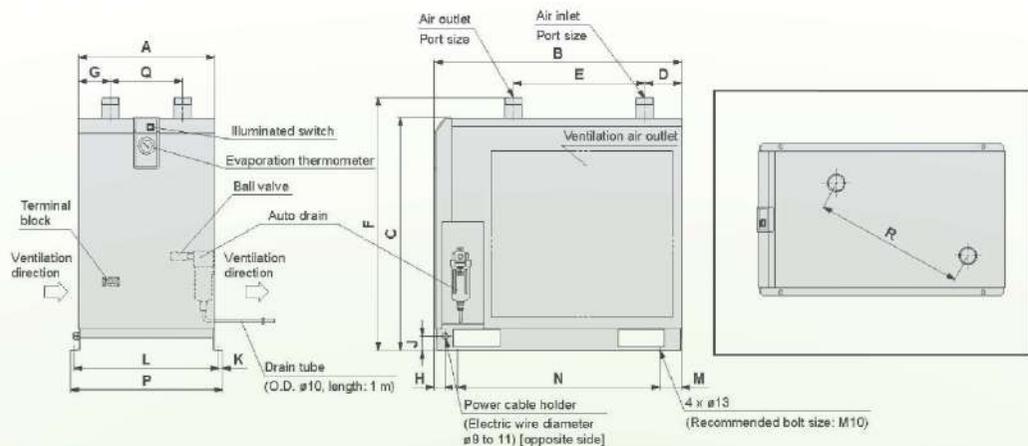

| Dimensions |           | (mm) |     |     |     |     |     |     |    |    |    |     |    |     |     |     |     |  |
|------------|-----------|------|-----|-----|-----|-----|-----|-----|----|----|----|-----|----|-----|-----|-----|-----|--|
| Model      | Port size | A    | B   | C   | D   | E   | F   | G   | H  | J  | K  | L   | M  | N   | P   | Q   | R   |  |
| IDFA55E    | R 2       | 470  | 855 | 800 | 128 | 455 | 868 | 110 | 36 | 50 | 13 | 500 | 75 | 700 | 526 | 250 | 519 |  |
| IDFA75E    |           |      |     | 900 |     |     | 968 |     |    |    |    |     |    |     |     |     |     |  |

Model Selection Guide

The corrected air flow capacity, which considers the user's operating conditions, is required for selecting the air dryer. Please select using the following procedures.

- Read the correction factor.**  
Obtain the correction factor A to D suitable for your operating condition from the table below.
- Calculate the corrected air flow capacity.**  
Obtain the corrected air flow capacity from the following formula.  
Corrected air flow capacity = Air consumption ÷ (Correction factor A × B × C)
- Select the model**  
Select the model which air flow capacity exceeds the corrected air flow capacity using the specification table. For air flow capacity, refer to the data D below)

**Data A:**  
Inlet Air Temperature

| Inlet air temperature (°C) | Correction factor |
|----------------------------|-------------------|
| 5 to 25                    | 1.30              |
| 30                         | 1.25              |
| 35                         | 1                 |
| 40                         | 0.83              |
| 45                         | 0.7               |
| 50                         | 0.6               |

**Data C:**  
Inlet Air Pressure

| Inlet air pressure (MPa) | Correction factor |             |
|--------------------------|-------------------|-------------|
|                          | IDFA3E-11E        | IDFA15E-75E |
| 0.3                      | 0.8               | 0.72        |
| 0.4                      | 0.87              | 0.81        |
| 0.5                      | 0.92              | 0.88        |
| 0.6                      | 0.96              | 0.95        |
| 0.7                      | 1.00              | 1.00        |
| 0.8                      | 1.04              | 1.06        |
| 0.9                      | 1.07              | 1.11        |
| 1.0                      | 1.1               | 1.16        |
| 1.2                      | 1.16              | 1.21        |
| 1.4                      | 1.21              | 1.25        |
| 1.6                      | 1.25              | 1.27        |

**Data B:**  
Ambient Temperature

| Ambient temperature (°C) | Correction factor |             |
|--------------------------|-------------------|-------------|
|                          | IDFA3E-11E        | IDFA15E-75E |
| 20                       | 1.1               | 1.1         |
| 25                       | 1                 | 1           |
| 30                       | 0.91              | 0.97        |
| 35                       | 0.83              | 0.89        |
| 40                       | 0.79              | 0.77        |

**Data D:**  
Air Flow Capacity

| Model                   | Air flow capacity (ℓ/min) [ANR] |        |        |        |         |         |         |         |         |         |
|-------------------------|---------------------------------|--------|--------|--------|---------|---------|---------|---------|---------|---------|
|                         | IDFA3E                          | IDFA4E | IDFA6E | IDFA8E | IDFA11E | IDFA15E | IDFA22E | IDFA37E | IDFA55E | IDFA75E |
| Outlet air pressure 3°C | 200                             | 400    | 600    | 1083   | 1333    | 2000    | 3033    | 4550    | 6500    | 11000   |
| 7°C                     | 250                             | 516    | 766    | 1383   | 1683    | 2533    | 3850    | 5783    | 7200    | 12000   |
| dew point 10°C          | 283                             | 566    | 833    | 1516   | 1866    | 2800    | 4233    | 6366    | 8500    | 13700   |



Refrigerated Air Dryer

Series IDFA□E



**NEW**  
Series IDFA

**Air flow capacity**  
Increased up to the  
**max 40%**  
(SMC comparison)

**Power consumption**  
Decreased up to the  
**max 40%**  
(SMC comparison)

**Refrigerant**  
**R134a (HFC)**  
**R407C (HFC)**  
Coefficient of destruction for ozone is zero

**Heat exchanger**  
Improved corrosion resistance with the use of stainless steel, plate type heat exchanger (IDFA4E to 75E)

**Built-in auto drain**



Previous IDF

External mounting auto drain



New IDFA

Built-in auto drain

SMC REGIONAL SUPPORT www.smcsing.com.sg


|   |   |   |   |
|---|---|---|---|
| <p>Singapore<br/>Tel : (+65) 6861 0888<br/>Email : sales@smcsing.com.sg</p> | <p>United Arab Emirates<br/>Tel : (+971) 4 801 5900<br/>Email : sales@smcdubai.ae</p> | <p>MALAYSIA<br/>Tel : (+603) 5635 0590<br/>Email : sales@smcmy.com.my</p> | <p>Vietnam<br/>Tel : (+84) 28 628 111 10<br/>Email : sales@smc-vietnam.com.vn</p> |
| <p>Indonesia<br/>Tel : (+62) 21897 1123<br/>Email : sales@smcid.co.id</p>   | <p>Philippines<br/>Tel : (+63) 02 809 0565<br/>Email : sales@shoketsu-smc.com.ph</p>  | <p>Distributor</p>  |   |

| Specification                              | Model                                | IDFA3E                                     | IDFA4E | IDFA6E | IDFA8E | IDFA11E | IDFA15E              | IDFA22E | IDFA37E | IDFA55E | IDFA75E |
|--|--------------------------------------|--|--------|--------|--------|---------|----------------------|---------|---------|---------|---------|
| <b>Relative Condition</b>                  | Air Flow Rate (ANR) (Note 1) l/min   | -23  | -23    | -23    | -23    | -23     | -23                  | -23     | -23     | -23     | -23     |
|  | At Outlet Pressure Dew Point of 10°C | 283  | 566    | 833    | 1516   | 1866    | 2800                 | 4233    | 6366    | 8500    | 13700   |
| <b>Operating Range</b>                     | Operating Pressure (Mpa)             | 0.7  |        |        |        |         |                      |         |         |         |         |
|  | Inlet Air Temperature (°C)           | 35   |        |        |        |         |                      |         |         |         |         |
|  | Ambient Temperature (°C)             | 25   |        |        |        |         |                      |         |         |         |         |
|  | Working Fluid                        | Compressed Air                             |        |        |        |         |                      |         |         |         |         |
| <b>Electric Specification</b>              | Inlet Air Temperature (°C)           | 5 to 50                                    |        |        |        |         |                      |         |         |         |         |
|  | Inlet Air Pressure (MPa)             | 0.15 to 1.0                                |        |        |        |         |                      |         |         |         |         |
|  | Ambient Temperature (°C)             | 2 to 40 (Relative Humidity of 85% or less) |        |        |        |         |                      |         |         |         |         |
|  | Power supply voltage                 | Single-phase 230VAC ±10% 50Hz              |        |        |        |         |                      |         |         |         |         |
|  | Operating Current (Note 2) (A)       | 1.2  | 1.2    | 1.2    | 1.4    | 2.7     | 3.0                  | 4.3     | 5.4     | 7.9     |         |
|  | Power Consumption (Note 2) (W)       | 180  | 180    | 180    | 208    | 385     | 470                  | 760     | 1130    | 1700    |         |
|  | Circuit Breaker (Note 3) (A)         | 5  |        |        |        |         |                      |         |         |         |         |
| <b>Condenser</b>                           |                                      | Air-cooled type                            |        |        |        |         |                      |         |         |         |         |
| <b>Refrigerant</b>                         |                                      | R134A (HFC)                                |        |        |        |         | R407C (HFC)          |         |         |         |         |
| <b>Auto drain (Float type)</b>             |                                      | AD38 (normally closed)                     |        |        |        |         | AD48 (normally open) |         |         |         |         |
| <b>Port size</b>                           |                                      | Rc 3/8                                     | Rc 1/2 | Rc 3/4 |        |         | Rc 1                 | R 1     | R 1 1/2 | R 2     |         |
| <b>Accessory (kg)</b>                      |                                      | Hexagon nipple                             |        |        |        |         |                      |         |         |         |         |
| <b>Weight (kg)</b>                         |                                      | 18   | 22     | 23     | 27     | 28      | 46                   | 54      | 62      | 100     | 116     |
| <b>Coating color</b>                       |                                      | Body panel: White 1 Base : Gray 2          |        |        |        |         |                      |         |         |         |         |
| <b>Compliant standards</b>                 |                                      | EU directive compliant (with CE marking)   |        |        |        |         |                      |         |         |         |         |
| <b>Applicable Compressor kW (Standard)</b> |                                      | 2.2  | 3.7    | 5.5    | 7.5    | 11      | 15                   | 22      | 37      | 55      | 75      |


Note 1: The data for l/min (ANR) is referring to the conditions of 20°C, 1atm. Pressure & relative humidity of 65%.  
 Note 2: the value is that of under specified condition.  
 Note 3: Install GFCI breaker that comes with sensitivity of 30mA  
 Note 4: When short period power shortage (including instantly recovered shortage) is recovered. It may take a longer starting period the un-usual starting or may not start due to the protective devices.

Construction Principle (Circuit for Air / Refrigerant)


IDFA3E

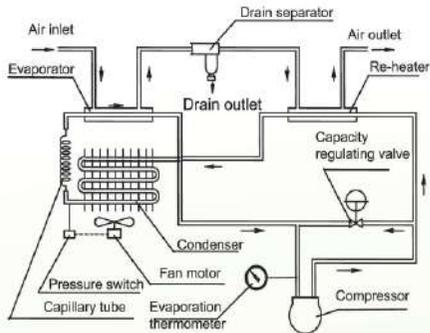


IDFA4E to 15E

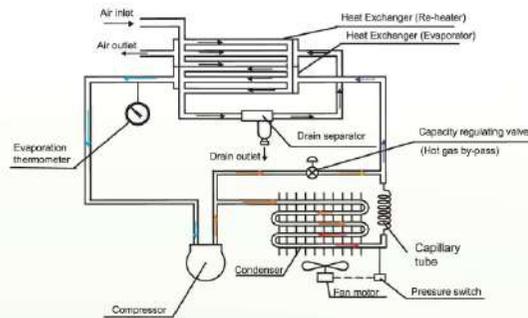


IDFA22E to 75E

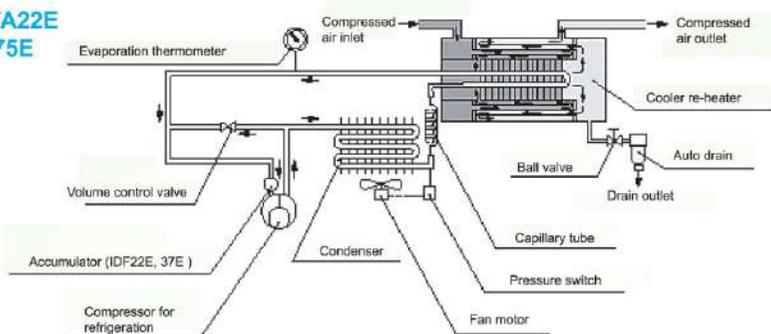

IDFA3E to 15E

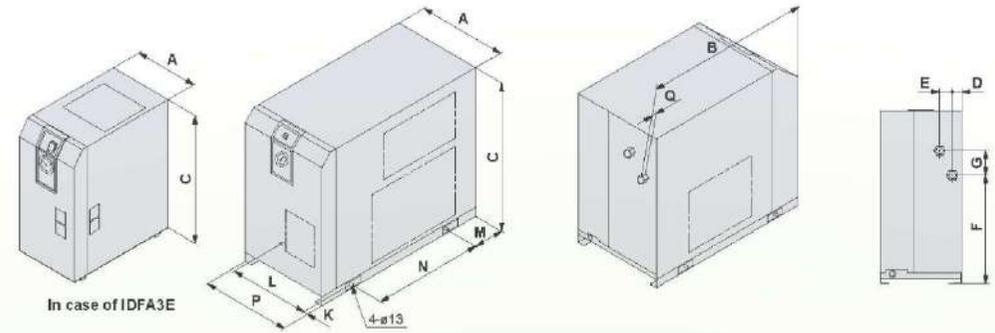

IDFA22E to 37E

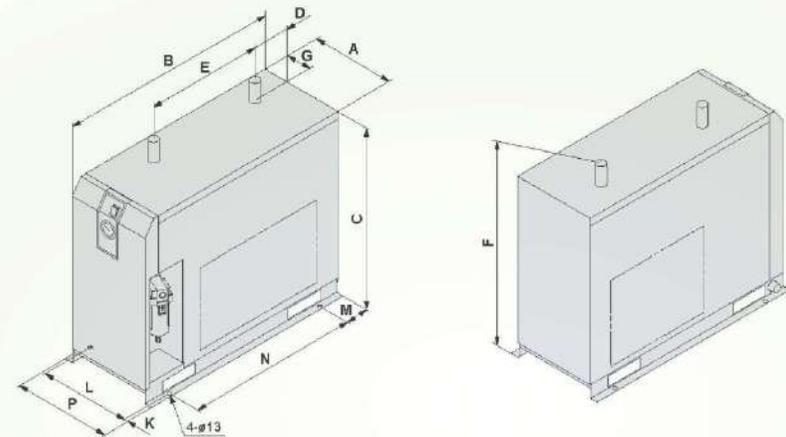

Dimensions

| Model   | Port size | A   | B   | C   | D   | E   | F   | G  | K* | L*  | M*  | N*  | P   | Q  |
|---------|-----------|-----|-----|-----|-----|-----|-----|----|----|-----|-----|-----|-----|----|
| IDFA3E  | Rc 3/8    | 226 | 410 | 473 | 67  | 125 | 304 | 33 | 36 | 154 | 21  | 330 |     | 15 |
| IDFA4E  | Rc 1/2    |     | 453 | 498 |     |     | 283 |    |    |     |     | 275 |     | 13 |
| IDFA6E  | Rc 3/4    | 270 | 455 |     | 31  | 42  |     | 80 | 15 | 240 | 80  |     |     |    |
| IDFA8E  |           |     | 485 | 568 |     |     | 355 |    |    |     |     |     | 300 | 15 |
| IDFA11E |           |     |     |     |     |     |     |    |    |     |     |     |     |    |
| IDFA15E | Rc 1      | 300 | 603 | 578 | 41  | 54  | 396 | 87 |    | 270 | 101 | 380 | 314 | 16 |
| IDFA22E | R 1       |     | 775 |     |     |     |     |    |    |     |     | 600 |     |    |
| IDFA37E | R 1 1/2   | 290 | 855 |     | 134 | 405 | 698 | 93 | 13 | 314 | 85  | 680 | 340 | -  |

\* Meaning the foot dimensions for the IDFA3.