

Hitachi Rotary Screw Compressors

HITACHI
Inspire the Next

HISCREW

NEXT II series (11-75kW)





**More Efficiency
Fit to Improve Productivity
Higher Level of User-friendly**


NEXT II series

Full Range Loaded with High Efficiency Motor

New Developed Air-End

Hitachi Latest Innovation of Air-End Technology

- High efficiency Air-End with low-noise and low-vibration supplies compressed air, constantly.

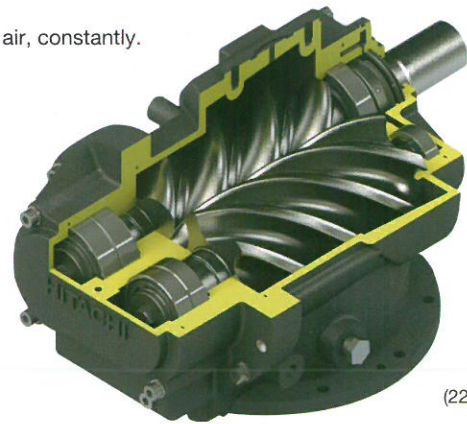


High Efficiency Capacity Control

V PLUS

Since Constant Pressure Control allows highly precise pressure control within range of ± 0.01 MPa, supply of compressed air at necessary pressure is possible with high efficiency.

M type

On M type models, I+P control (purge + motor auto START/STOP) is applicable during partial load operation.

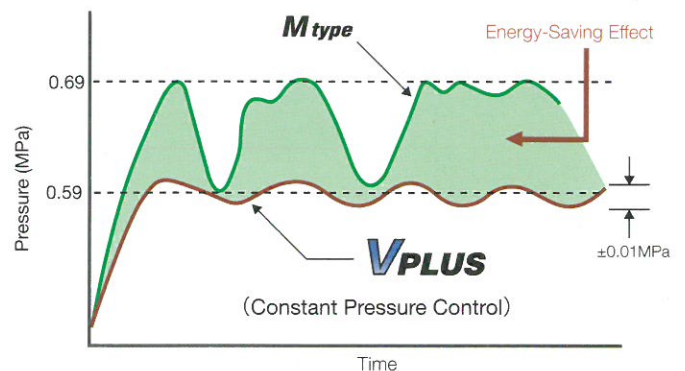

IPC Control (Intelligent Pressure Control)

VPLUS M type

By estimating use point pressure in accordance with air consumption, IPC control decreases discharge pressure during low load operation, which enables Energy-Saving.


Patent JP4425768 and others

Example of effect by IPC



- Conditions**
- Air compressor: OSP-37VAN2
 - Control pressure setting: 0.70MPa
 - Use point pressure during full load: 0.55MPa
 - Piping pressure loss during full load: 0.15MPa

Graph of pressure change (Theoretical values)

① IPC-OFF (Conventional inverter control model)

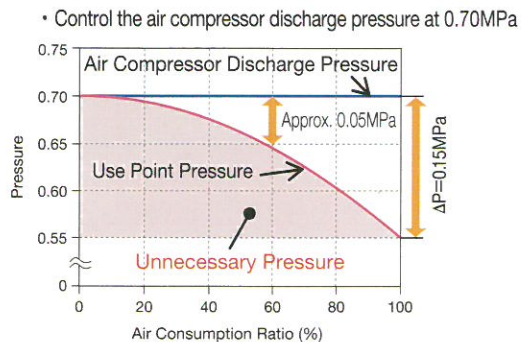

② IPC-ON (NEXT II series)

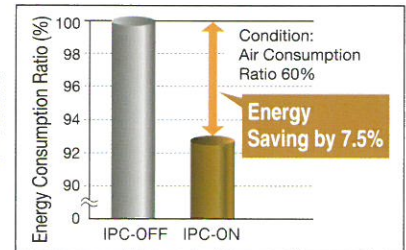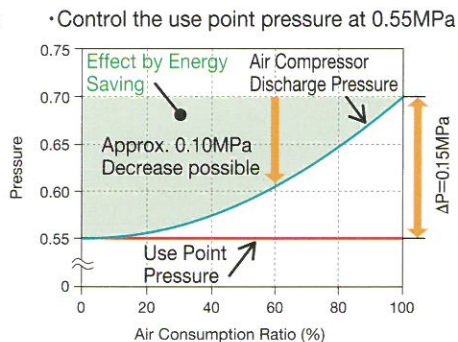

*Due to estimation control, use point pressure varies in accordance with use conditions.

Multi-Function Touch Panel*

Significant Improvement of User-friendly

Various Functions Available

Operation Data Logging




*The image described above has been modified.




Main Functions

- ① Schedule Operation (Weekly Timer)
- ② Instantaneous Power Interruption (IPI) Restart Function
- ③ Alternate Operation (Option)
- ④ Multi-unit Control (Option)
- ⑤ AUTO Operation
- ⑥ Communication Function
- ⑦ Web Server Function
- ⑧ Display/Store of Operation Data
- ⑨ Store/Load of Settings
- ⑩ Maintenance Time Notification
- ⑪ Operation Data Memory, Display in Graph
- ⑫ Display of Shutdown and Alarm History


Monitor Indication



Notice Indication



E-MODE



*Touch panel less option does NOT have these functions. (Touch panel less option is available only for 18/22/30/37MAN2.)
 Touch Panel is NOT available for 11/15kW.

IT Communication Functions*

USB Flash Memory Possible for Data Logging

*Necessary to prepare a USB flash memory device (5.5 cm or smaller) on user's side.
 *Operation data for one day is approximately 400kB. (For reference)

Web Server Function via Bluetooth®


*Necessary to prepare a Bluetooth® USB dongle on your side.
 *For setting changes, part of the items are applicable.

Modbus® Communication

Open network serial communication Modbus®/RTU is supported as standard

*Modbus®/TCP support is optional.

USB flash memory (data retrieving)
 (Standard) pressure/temperature/current/history/time

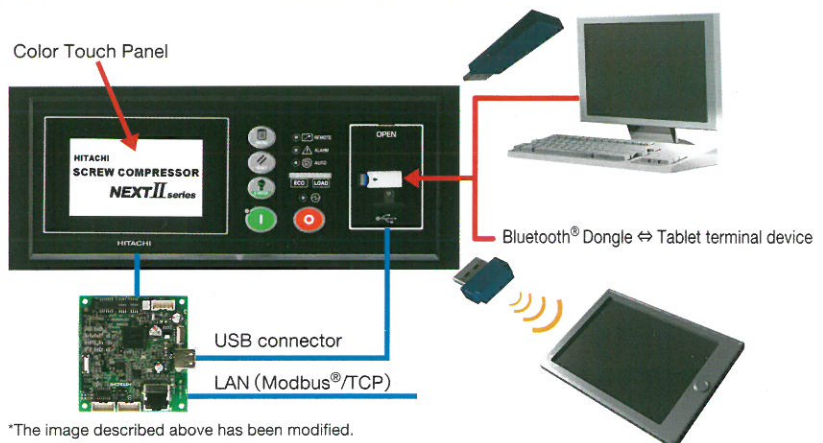

*The image described above has been modified.

*Touch panel less option does NOT have these functions.
 (Touch panel less option is available only for 18/22/30/37MAN2.)
 Touch Panel is NOT available for 11/15kW.

*Bluetooth is the registered trademark of Bluetooth SIG, Inc (US).
 *Modbus is the registered trademark of Schneider Automation Inc.

Versatility in Hitachi Original Technology


PQ WIDE MODE

PQ WIDE MODE, by automatically adjusting the maximum rotation speed of the compressor, enables to increase the discharge FAD in case that the pressure declines. Compared to conventional VSD, compressor is possible to operate at a wider range of pressure (P) and FAD (Q).

FAD at PQ WIDE MODE

Unit: m³/min.

Model	Discharge Pressure MPa	0.45	0.50	0.60	0.70	0.85	0.90
11kW	-	-	1.79	1.79	1.79	1.63	1.53
15kW	-	-	2.4	2.4	2.4	2.15	2.04
22kW	4.3	4.3	4.3	4.1	3.6	-	-
37kW	7.1	7.1	7.1	6.8	6.2	-	-
55kW	10.6	10.6	10.6	10.1	9.1	-	-
75kW	14.0	14.0	14.0	13.3	12.0	-	-

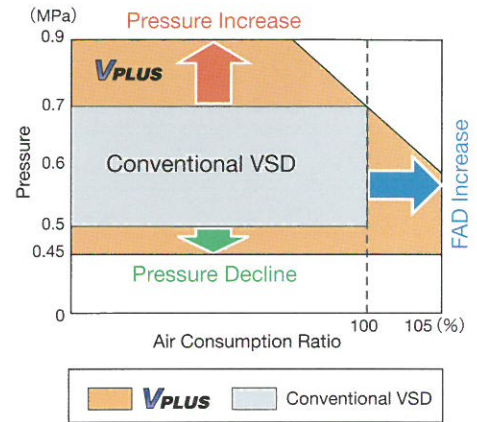

Various System Combinations with VPLUS

To respond to the change of air use, Hitachi provides various system combinations with VSD for further Energy-Saving.

V-M Combination System

If 2 or 3 compressors are necessary, Hitachi V-M combination system is your excellent choice. There is great merit on Hitachi V-M combination system which divides 1 compressor into 2.



Single-V System/Multi-V System

Besides V-M Combination System, Energy-Saving is also possible with any combination such as Single-V multi-unit control system, or Multi-V multi-unit control system etc.

Example Effect of V-M Combination System

- 1 Energy consumption is similar to the one of 75kW Vplus.
- 2 Power consumption is saved by 39% or 164MWh/year, when the air consumption ratio is 60% at pressure of 0.6MPa.


* Calculation condition: 6,000h/year running

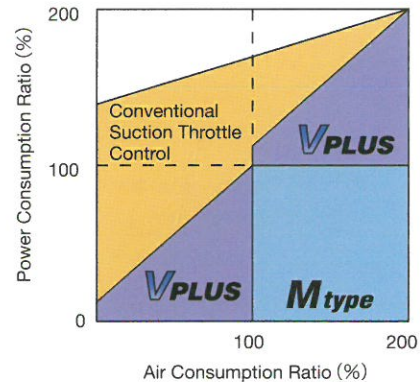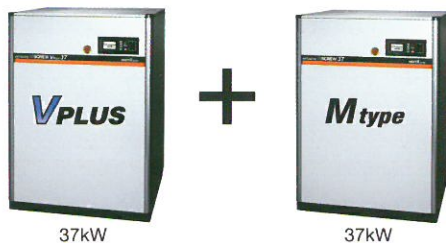

High Reliability

Up to 50°C

- Standard up to 45°C
- Operation is possible under 50°C

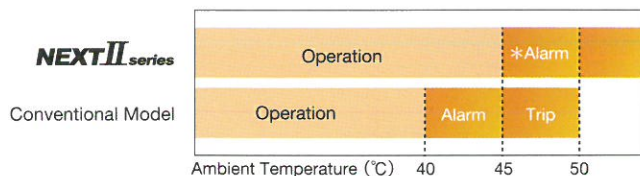

* Ambient temperature alarm will be indicated when ambient temperature is over 45°C. Continuous operation at higher than 45°C may shorten lifetime of lubricating oil and electric parts.

AC Reactor*

- Protect Fan Inverter against voltage surge due to unstable power supply.

*For 22/37kW and 55/75kW only

NEW HISCREW OIL NEXT

- Designed for screw air compressor.
- Oil change cycle is every 2 years or 12,000hr which comes first.



Package Filter as Standard

- Easy maintenance
- Maintenance information is indicated on the touch panel periodically.



Standard Specification (11–75kW)



Item - Unit		Model	OSP-11VAN2	OSP-15VAN2	OSP-22VAN2	OSP-37VAN2	OSP-55VAN2	OSP-75VAN2					
Cooling Method		–	Air-Cooled										
Nominal Output		kW	11	15	22	37	55	75					
		HP	15	20	30	50	75	100					
Rated	Discharge Pressure	MPa	0.85			0.7							
		PSI	123			102							
Discharge Capacity	m ³ /min	1.63	2.15	4.1	6.8	10.1	13.3						
	CFM	58	76	145	240	357	470						
PQ WIDE MODE	Discharge Pressure	MPa	0.7	0.9	0.7	0.9	0.6	0.85	0.6	0.85			
		PSI	102	131	102	131	87	123	87	123	87	123	
Discharge Capacity	m ³ /min	1.79	1.53	2.4	2.04	4.3	3.6	7.1	6.2	10.6	9.1	14.0	12.0
	CFM	63	54	85	72	152	127	251	219	374	321	494	424
Intake Air Pressure/Temperature		–	Atmospheric Pressure / 0 to 45°C										
Discharge Temperature		°C	Atmospheric Temperature + 15 or below										
Driving Method		–	Inverter + 4-Pole TEFC Motor with V-Belt Drive		DCBL Motor Direct Drive		DCBL Motor with Coupling						
Starting Type		–	Soft Start										
Lubricating Oil		–	HITACHI NEW HISCREW OIL NEXT										
Lubricating Oil Quantity		L	6	7	10	15	28	39					
Nominal Output of Cooling Fan		kW	–		1.5 (with Inverter Control)			2.2 (with Inverter Control)					
Discharge Pipe Diameter		–	Rc 1		Rc 1-1/2		Rc 2						
Dimension (W×D×H)		mm	950×780×1,250		1,000×1,050×1,550		1,200×1,150×1,650						
Weight		kg	343	378	450	670	1,230	1,405					
Sound Level		dB [A]	58	61	58	60	64	66					


Mtype

Item - Unit		Model	OSP-11M5AN2	OSP-15M5AN2	OSP-18M5AN2	OSP-22M5AN2	OSP-30M5AN2	OSP-37M5AN2
Cooling Method		–	Air-Cooled					
Nominal Output		kW	11	15	18	22	30	37
		HP	15	20	24	30	40	50
Rated	Discharge Pressure	MPa	0.85 <0.7>	0.85 <0.7>	0.7 <0.85>	0.7 <0.85> [1.0]	0.7 <0.85>	0.7 <0.85> [1.0]
		PSI	123 <102>	123 <102>	102 <123>	102 <123> [145]	102 <123>	102 <123> [145]
Discharge Capacity	m ³ /min	1.79 <1.63>	2.4 <2.15>	3.4 <3.0>	4.0 <3.7> [3.3]	6.0 <5.4>	7.2 <6.6> [5.8]	
	CFM	63 <58>	85 <76>	120 <106>	141 <131> [117]	212 <191>	254 <233> [205]	
Intake Air Pressure/Temperature		–	Atmospheric Pressure / 0 to 45°C					
Discharge Temperature		°C	Atmospheric Temperature + 15 or below					
Driving Method		–	4-Pole TEFC Motor with V-Belt Drive					
Starting Type		–	Direct connection/Star-Delta			Star-Delta		
Lubricating Oil		–	HITACHI NEW HISCREW OIL NEXT					
Lubricating Oil Quantity		L	6	7	10	15	15	15
Nominal Output of Cooling Fan		kW	–		1.5	1.5 (with Inverter Control)	1.5	1.5 (with Inverter Control)
Discharge Pipe Diameter		–	Rc 1		Rc 1-1/2			
Dimension (W×D×H)		mm	950×780×1,250		1,000×1,050×1,550		1,200×1,150×1,650	
Weight		kg	338	363	670	930	930	
Sound Level		dB [A]	58	61	59	65	65	

Item - Unit		Model	OSP-55M5AN2	OSP-75M5AN2
Cooling Method		–	Air-Cooled	
Nominal Output		kW	55	75
		HP	75	100
Rated	Discharge Pressure	MPa	0.7 <0.85> [1.0]	
		PSI	102 <123> [145]	
Discharge Capacity	m ³ /min	10.0 <9.0> [8.3]	13.2 <11.9> [10.9]	
	CFM	353 <318> [293]	466 <420> [385]	
Intake Air Pressure/Temperature		–	Atmospheric Pressure / 0 to 45°C	
Discharge Temperature		°C	Atmospheric Temperature + 15 or below	
Driving Method		–	2-Pole TEFC Motor with Gear Driving	
Starting Type		–	Star-Delta	
Lubricating Oil		–	HITACHI NEW HISCREW OIL NEXT	
Lubricating Oil Quantity		L	29	40
Nominal Output of Cooling Fan		kW	1.5 (with Inverter Control)	2.2 (with Inverter Control)
Discharge Pipe Diameter		–	Rc 2	
Dimension (W×D×H)		mm	2,000×1,200×1,800	
Weight		kg	1,400	1,690
Sound Level		dB [A]	65	67

Notes:

- Capacity is measured according to ISO 1217, Third Edition, Annex C.
- Pressures are indicated as the gauge pressure.
- Sound Level is the converted value under the condition of 1.5m in front and 1m height in an anechoic room.
It may vary in different operating conditions and/or different environment with echo of actual field installations.
Sound Level may be increased by 3dB at PQ WIDEMODE ON.
- Contact the supplier for the dryer and filters selection at PQ WIDEMODE ON.
- Do NOT use any oil other than "HITACHI NEW HISCREW OIL NEXT".
- Install the proper size air receiver tank and the earth leakage circuit breaker which are out of scope of supply from Hitachi.
- Install the air compressor indoors and avoid flammable and corrosive environment, moisture and dust.
- < > [] show values of capacity under different discharge pressures.
- 1.0 MPa model is ONLY available on 22/37/55/75kW Mtype.
For details, contact your nearest dealer of Hitachi local representative office.
- Digital instrument panel can be chosen only for Mtype (18/22/30/37kW) as Touch Panel less option.
- 11.11/15kW is only available digital instrument panel (Touch panel less).
Touch panel is NOT available.

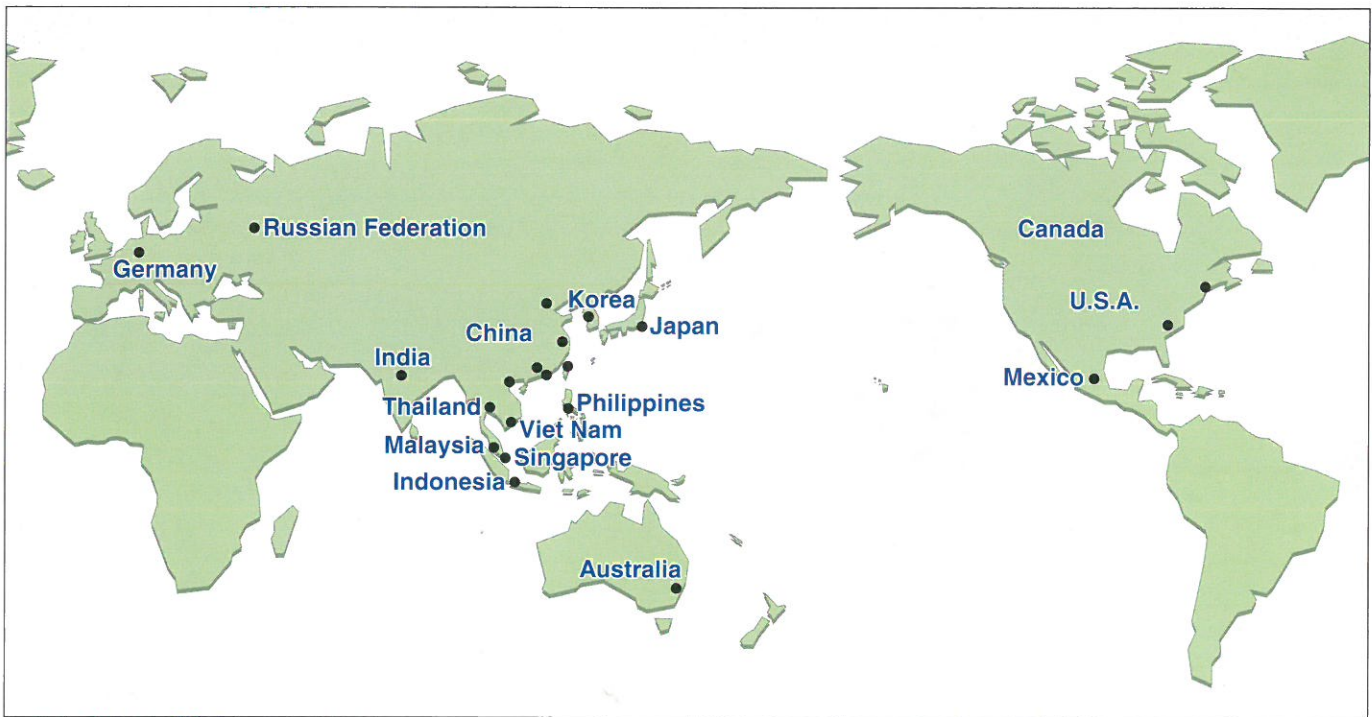

Asia & Oceania

China

Hitachi Industrial Equipment Systems (China) Co., Ltd.

(Shanghai Branch)
Room1207, Rui Jin Building, No.205 Maoming Road(S) Shanghai 200020
TEL : +86 (21) 5489-2378
FAX : +86 (21) 3356-5070

(Beijing Branch)

Room1420, Beijing Fortune Building, No.5 Dong San Huan Bei Road, Chao Yang District, Beijing 100004
TEL : +86 (10) 6590-8180
FAX : +86 (10) 6590-8189

(Guangzhou Branch)

Room3403, Office Tower, CITIC Plaza , No.233 Tianhe North Road, Guangzhou 510613
TEL : +86 (20) 3877-0438
FAX : +86 (20) 2735-3820

Hitachi Industrial Equipment Systems (Hong Kong) Co., Ltd.

6th Floor, North Tower World Finance Centre, Harbour City, Canton Road, Tsim Sha Tsui, Kowloon Hong Kong
TEL : +852 2735-9218
FAX : +852 2735-6793

Taiwan Hitachi Asia Pacific Co., Ltd

3rd Floor, No. 167, Tun Hwa N. Road, Hung-Kuo Building, Taipei 10512, Taiwan
TEL : +886 (2) 2718-3666
FAX : +886 (2) 2514-7664

India

Hitachi India Pvt. Ltd.

Units 304-306, 3rd Floor, ABW Elegance Tower, Jasola District Centre, New Delhi 110 025, India
TEL : +91 (11) 4060-5252
FAX : +91 (11) 4060-5253

Indonesia

PT Hitachi Asia Indonesia
Menara BCA 38th Floor Suite #3804 & 3805 Jl. M. H Thamrin No.1, Jakarta 10310, Indonesia
TEL : +62 (21) 2358-6757
FAX : +62 (21) 2358-6755

Malaysia

Lot 6498, Batu 5 3/4, Lorong Haji Abdul Manan, 42100 Klang, Selangor Darul Ehsan, Malaysia
TEL : +60 (3) 3290 2323

Philippines

Hitachi Asia Ltd. Philippine Branch
Unit 8, 11th Floor Zuellig Bldg., Makati Avenue corner Paseo de Roxas Makati City, Philippines 1225
TEL : +632 886-9018
FAX : +632 887-3794

Singapore

Hitachi Asia Ltd.
(Industrial Components & Equipment Group)
No.30, Pioneer Crescent #10-15, West Park Bizcentral Singapore 628560
TEL : +65-6305-7400
FAX : +65-6305-7401

Thailand

Hitachi Asia (Thailand) Co., Ltd.

18th Floor, Ramaland Building, 952 Rama IV Road Bangrak, Bangkok 10500
TEL : +66 (2) 632-9292
FAX : +66 (2) 632-9299

Viet Nam

Hitachi Asia Ltd.
(Ho Chi Minh City Office)
4th Floor, The Landmark, 5B Ton Duc Thang Street District 1, Ho Chi Minh City
TEL : +84 (8) 3829-9725
FAX : +84 (8) 3829-9729
(Ha Noi Office)
Sun Red River Bldg., 5th Floor, 23 Phan Chu Trinh Street Hoan Kiem District, Hanoi
TEL : +84 (4) 3933-3123
FAX : +84 (4) 3933-3125

Australia

Hitachi Australia Pty Ltd.
Level 8, 123 Epping Road, North Ryde, NSW 2113
TEL : +61 (2) 9888-4100
FAX : +61 (2) 9888-4188

Europe

Germany

Hitachi Europe GmbH
(Industrial Components & Equipment Group)
Am Seestern 18 (Euro Center)
D-40547 Düsseldorf
TEL : +49 (211) 5283 0
FAX : +49 (211) 5283 649

Russian Federation

Hitachi, Ltd. (Moscow Office)

Millenium House, 12, Trubnaya, Moscow 107045
TEL : +7 (495) 787-4020
FAX : +7 (495) 787-4021

Latin America

Mexico

Hitachi Industrial Equipment Mexico S.A. de C.V.
Avenida Rio Seguro 161, Parque Tecno Industrial Castro del Rio Tramo Irapuato-Silao km125, Carretera Panamericaa C.P.36810, Irapuato, Gto., Mexico
TEL : +52 (462) 693-7088, -7089, -7090
FAX : +52 (462) 693-7091

North America

U.S.A.

Hitachi America, Ltd.
(Industrial Components & Equipment Division)
50 Prospect Avenue, Tarrytown, New York, 10591-4625
TEL : +1 (914) 332-5800
FAX : +1 (914) 332-5555
(Charlotte Office)
(Industrial Components & Equipment Division)
6901 Northpark Blvd., Suite A, Charlotte, NC 28216
TEL : +1 (704) 494-3008
FAX : +1 (704) 599-4108

Products described in this catalog may differ from different countries or regions. Contact your nearest Hitachi representative office for details.

Product appearances and specifications in this catalog are subject to change with or without notice, as Hitachi continues to develop the latest technologies and products for its customers.

Hitachi Industrial Equipment Systems Co., Ltd.

For further information, please contact your nearest sales representative.